




Industrial Swing Door


CAD Drawing ✓ Demand Customization ✓ Large Quantity Discount ✓



STRUCTURE DIAGRAM

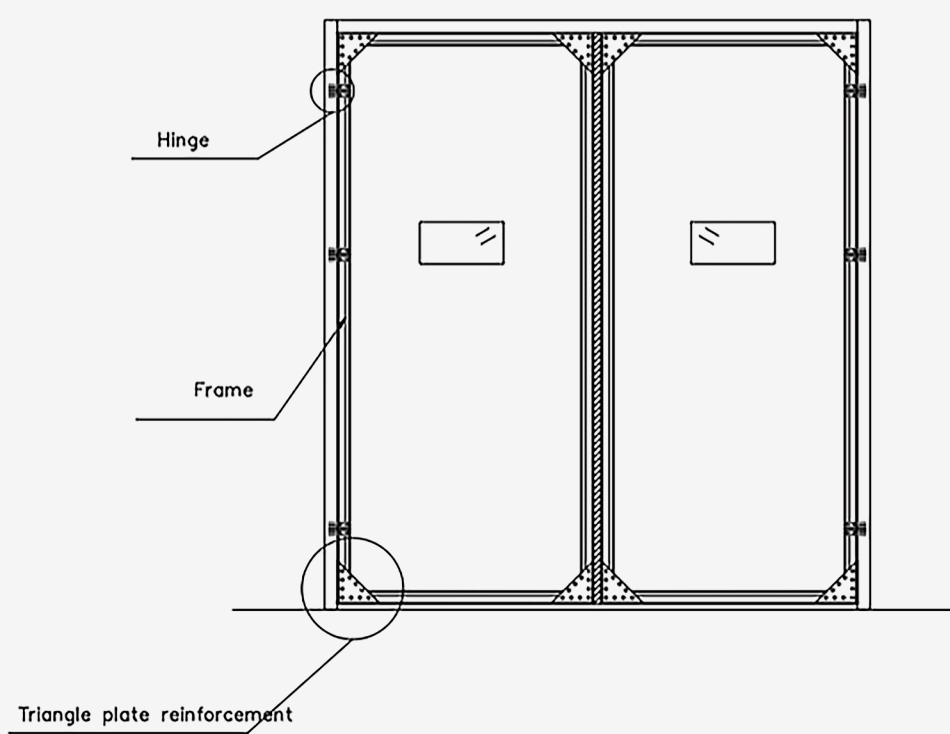

PANEL

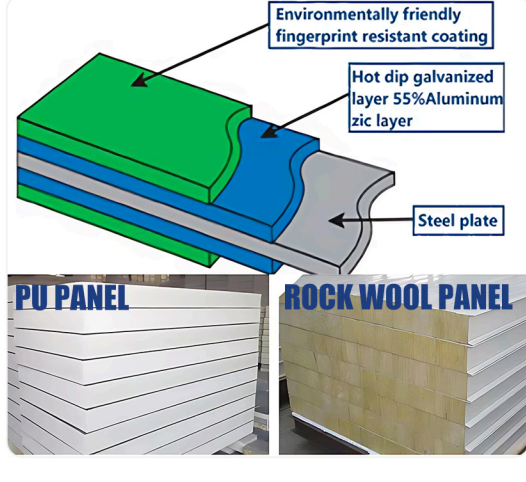

■ PU Sandwich Panel:

Total thickness 50mm, density 50kg/m³, surface plate thickness 0.4mm galvanized steel/0.5mm aluminum alloy, better insulation and windproof.


■ ROCK Wool Panel:

Total thickness 50mm, density 50kg/m³, surface plate thickness 0.4mm galvanized steel /0.5mm aluminum alloy, better fire performance.




EDGE COVER OF DOOR PANEL

The door panel of industrial sliding door is surrounded by galvanized steel frame, which effectively enhances the structural strength of the door panel, improves the overall stability and resistance to deformation, and adapts to high-frequency opening and complex industrial environments.

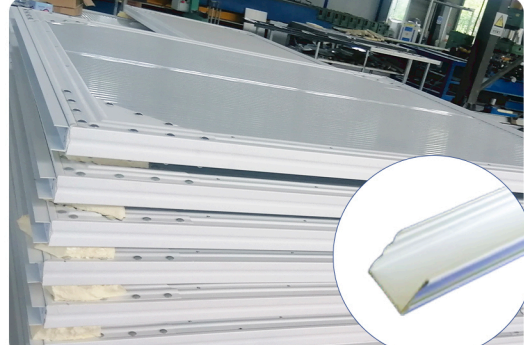

SEALS

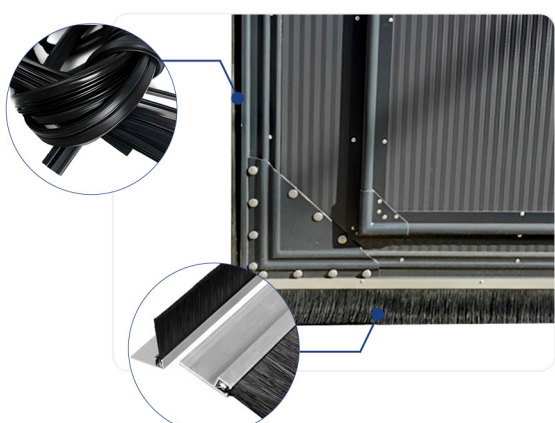

The top and bottom of the door are sealed with high-density double-layer brush strips.

Between the door frame and each door panel, EPDM rubber strips are equipped to effectively improve the overall sealing performance and block dust, wind, rain and noise.

CUSTOMIZED OPTIONS



Ral Code Color

Recommended Colors:

White/Grey/Black/Red/Blue




PEDESTRIAN DOOR

Pedestrian doors are available as an option to facilitate the passage of people on a daily basis. For larger folding doors, the addition of pedestrian doors can significantly improve the efficiency of passage and avoid the inconvenience of frequently opening the entire door.



WINDOW

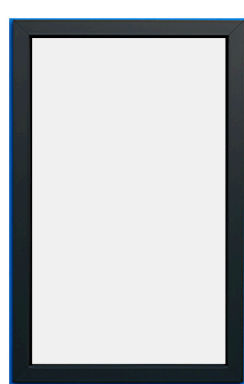

The optional **window** design not only effectively introduces natural light to enhance the brightness of the interior, but also facilitates the observation of the interior by external personnel, enhancing the sense of transparency and visibility of the space.