





Stacking High Speed Door



CAD Drawing ✓ Demand Customization ✓ Large Quantity Discount ✓



STRUCTURE DIAGRAM

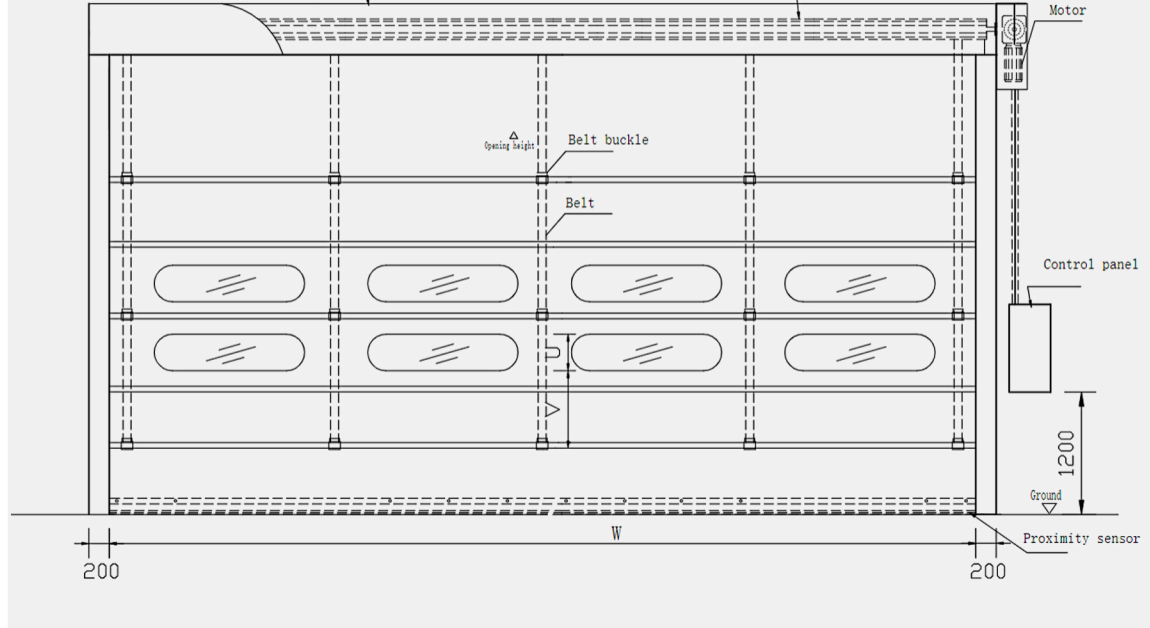

PVC FABRIC

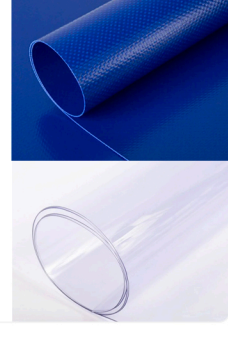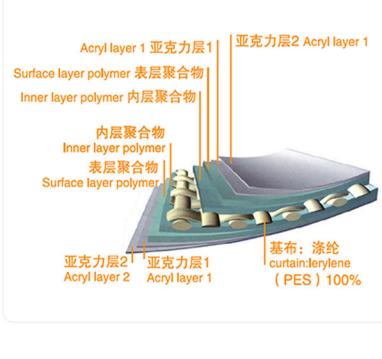


- Material: PVC Fabric; Standard 1.0mm thick (950g/sqm)
- Available Thickness: 1.2mm -1.5mm;Flameresistant material




FRAME AND TRACKS

- Two tracks,one top cover and one motor cover
- Thickness: 1.5mm for guide rail,1.0mm for cover box

Standard material: Galvanized steel, surface is painted
Optional material: 304 stainless steel or aluminum alloy



MOTOR AND CONTROLLER

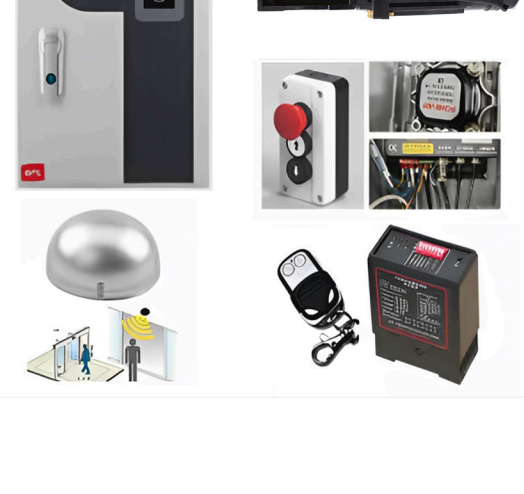


- Italy servo technology motor. More stable and quicker response
- Italy servo technology controller with English interface,easy to use
- Double encoder,absolute encoder+inbuilt incremental encoder,more accurate and few maintenance




WINDPROOF ROD

Stacking high speed doors are equipped with multi-stage **wind-resistant rods**, which effectively enhance the structural strength of the door curtain and improve the windproof performance, and are suitable for large doorways and windy environments.

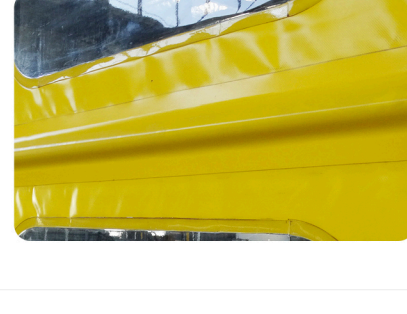

PULL ROPE

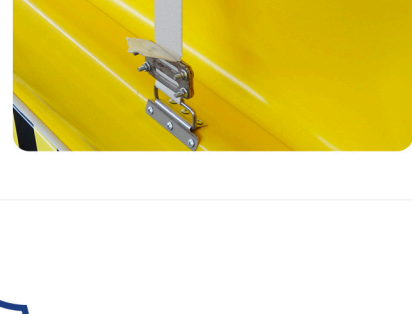


Stacking high speed door is equipped with high-strength **pull ropes**, which are used to pull the door curtain upward stacking and closing in segments to ensure stable and efficient operation of the door body.



SAFETY DEVICE

ALI Below There Devices are Included as Standard

Safety photo cell sensor When there is human or vehicle under the door,the door will stop closing and get up automatically. This will avoid accident collisions.

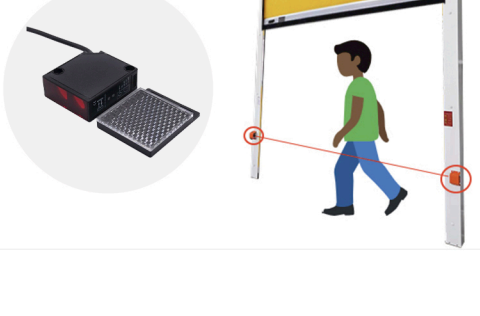


Safety Bottom Airbag Sensor


When the bottom bar of the door touches something,it will stop closing immediately and get up automatically.

Alarm Light and Emergency Buttons

The lamp flashing to warn passing human or vehicles,and buttons on both side.

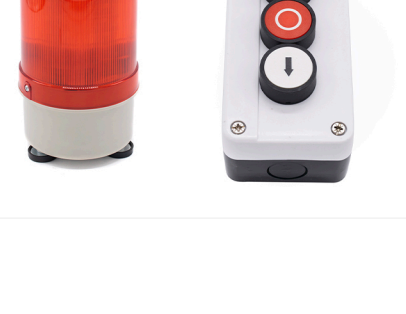


OPERATION METHODS

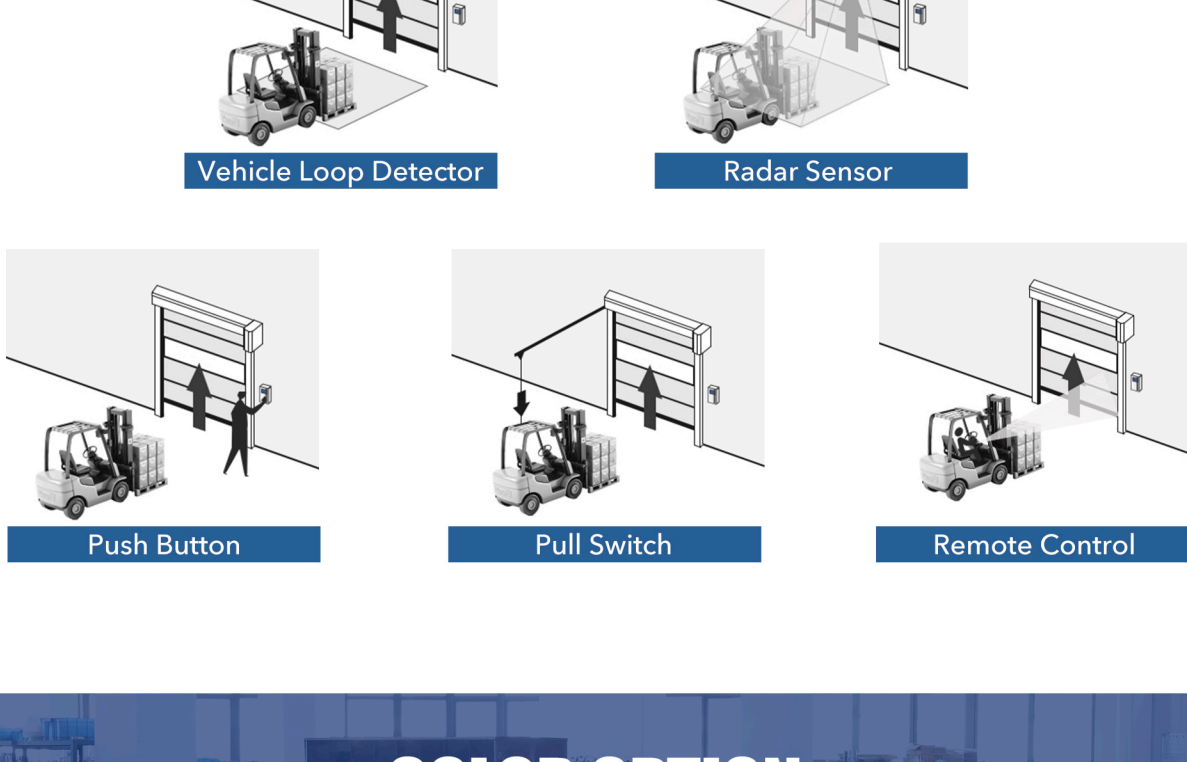

COLOR OPTION

Popular Colors



RAL Code Color