




Aluminum Roller Shutter Door

CAD Drawing ✓ Demand Customization ✓ Large Quantity Discount ✓



STRUCTURE DIAGRAM

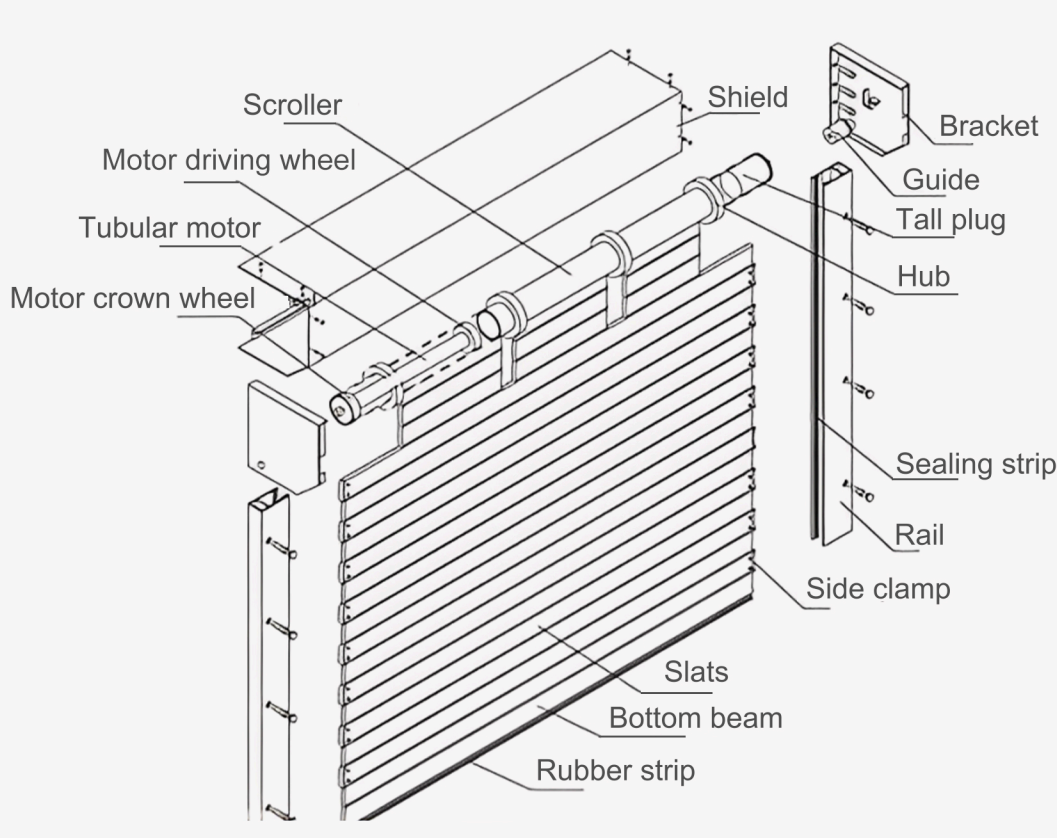

MOTOR



■ Chinese top brand tubular motor

■ Can be opened manually when power failure

We use "Anlin brand" tubular motors, which can be used to open the door manually during a power outage, providing double protection.



BUTTON AND REMOTE

Dual control with button and remote, easy to operate.
Easy to operate and adapt to different usage scenarios.
Easy to control both near and far.



Wireless Wall Switch
Beautiful and easy to install



SAFETY DEVICE



Closure Detector



Photocell Sensor

Closure detector and photocell sensor serve as safety devices that can detect pedestrians passing by in time, providing safety guarantee for people when entering and exiting.



SLATS


■ Slat thickness: 0.6-2.0mm

■ Slat material: Aluminum alloy

Standard slats: unfilled with PU foam, lightweight structure, lower cost, suitable for places with low requirements for thermal insulation.

Sandwich slats: filled with PU foam, with stronger sound and thermal insulation properties, suitable for applications with higher requirements for environmental control.

There are other more styles available.



RAILS WITH SEAL




Equipped with sealing tracks fitted with sealing strips. Effectively blocks air, dust, and noise intrusion. Enhances sealing performance and indoor conditions, ideal for clean or noise-sensitive areas.



HOOD COVER BOX

Hood cover box made of 1mm powder-coated galvanized steel. Corrosion-resistant and visually refined. Protects internal components, extends service life, and enhances the door's overall appearance.

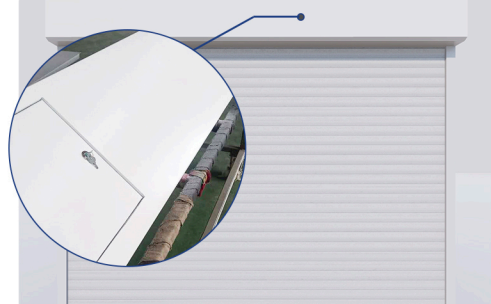

COLOR CUSTOMIZED

✓ Ral Code Color

✓ Color Splicing

✓ Wood Grain

