



## Aluminum Transparent Roller Shutter Door


CAD Drawing ✓ Demand Customization ✓ Large Quantity Discount ✓



### STRUCTURE DIAGRAM

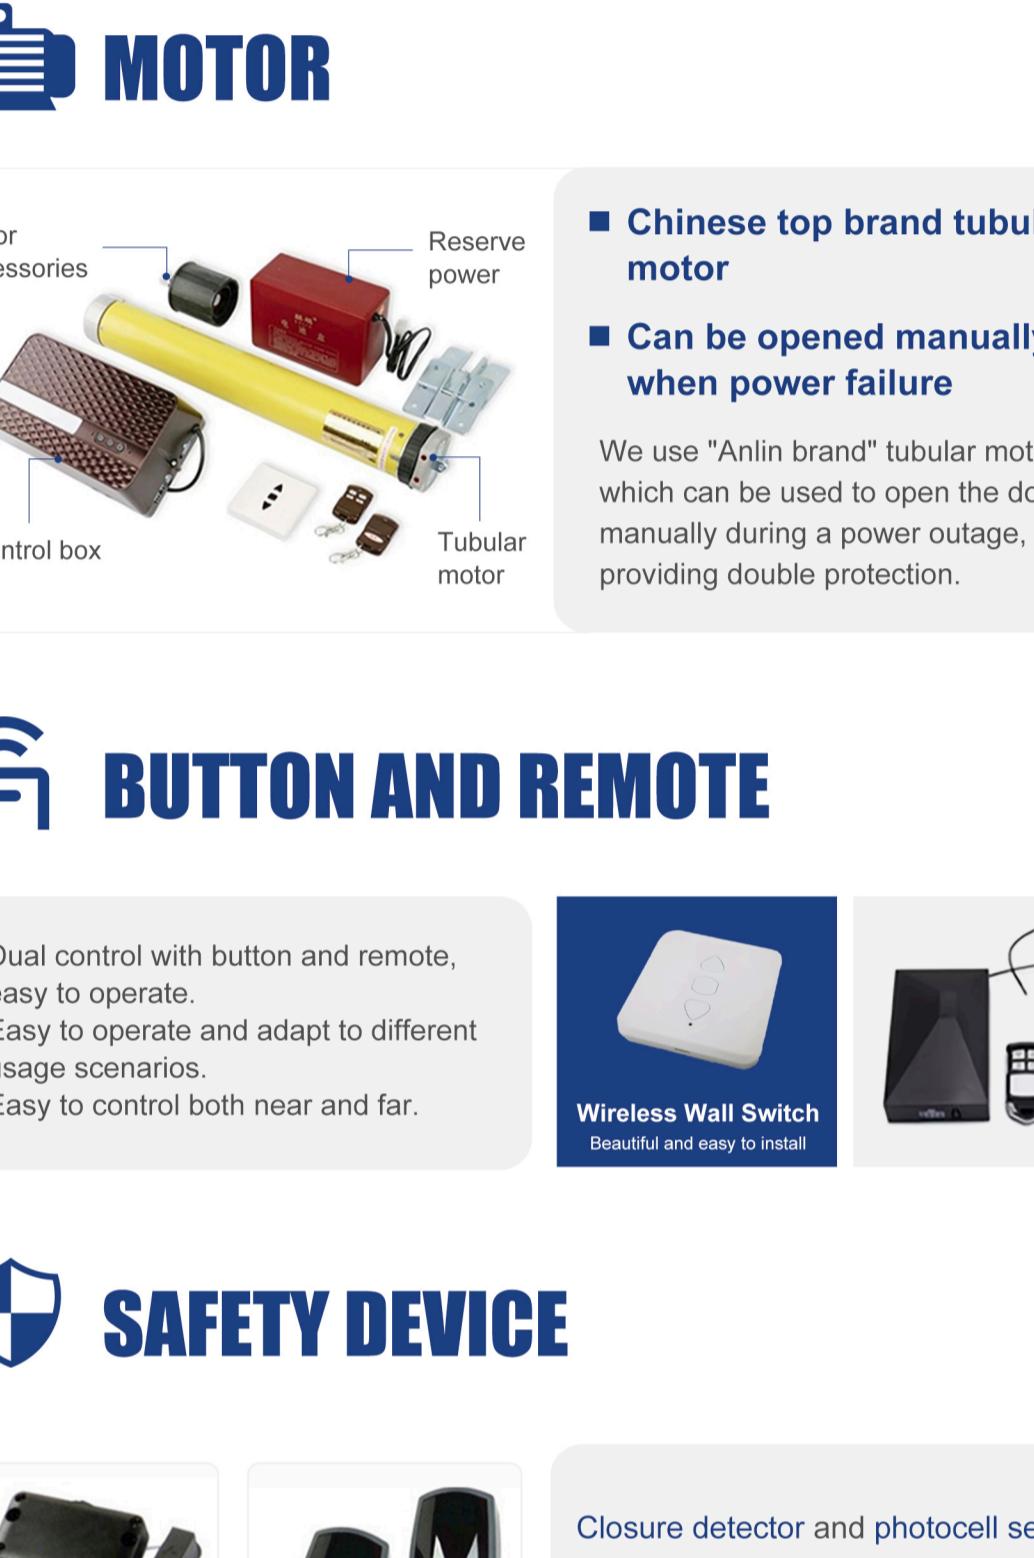


### MOTOR

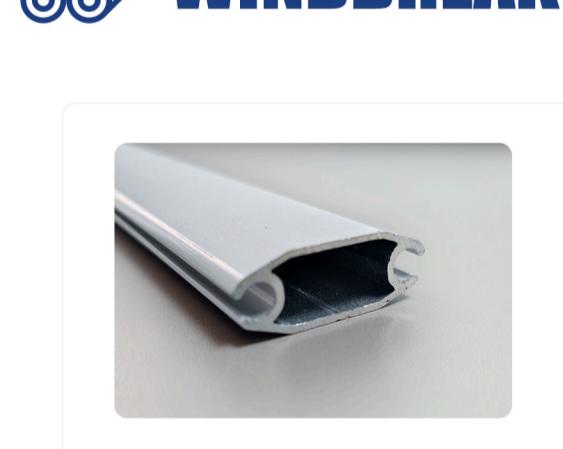

■ Chinese top brand tubular motor

■ Can be opened manually when power failure

We use "Anlin brand" tubular motors, which can be used to open the door manually during a power outage, providing double protection.



### BUTTON AND REMOTE


Dual control with button and remote, easy to operate.

Easy to operate and adapt to different usage scenarios.

Easy to control both near and far.

Wireless Wall Switch

Beautiful and easy to install



### SAFETY DEVICE



Closure detector and photocell sensor serve as safety devices that can detect pedestrians passing by in time, providing safety guarantee for people when entering and exiting.



### SLATS

■ Slat thickness: 2.0mm

■ Slat material: Polycarbonate(PC)

Excellent impact resistance, weather resistance and light transmission. The curtains are strong, transparent and resistant to deformation, providing a clear view of the interior space while safeguarding safety and security needs.



### WINDBREAK



■ Thickness: 1.0mm  
■ Material: Aluminum alloy

Increases door strength and wind resistance.

Ensures stable operation in harsh weather and extends service life.



### RAILS WITH SEAL

Equipped with sealing tracks fitted with sealing strips. Effectively blocks air, dust, and noise intrusion.

Enhances sealing performance and indoor conditions, ideal for clean or noise-sensitive areas.



### HOOD COVER BOX



Hood cover box made of 1mm powder-coated galvanized steel. Corrosion-resistant and visually refined.

Protects internal components, extends service life, and enhances the door's overall appearance.



### RAIL CODE COLOR



### COLOR SPLICING



### LOGO



### CUSTOMIZED SERVICE



### Rail Code Color



### Color Splicing



### LOGO