




Steel Roller Shutter Door

CAD Drawing ✓ Demand Customization ✓ Large Quantity Discount ✓



STRUCTURE DIAGRAM

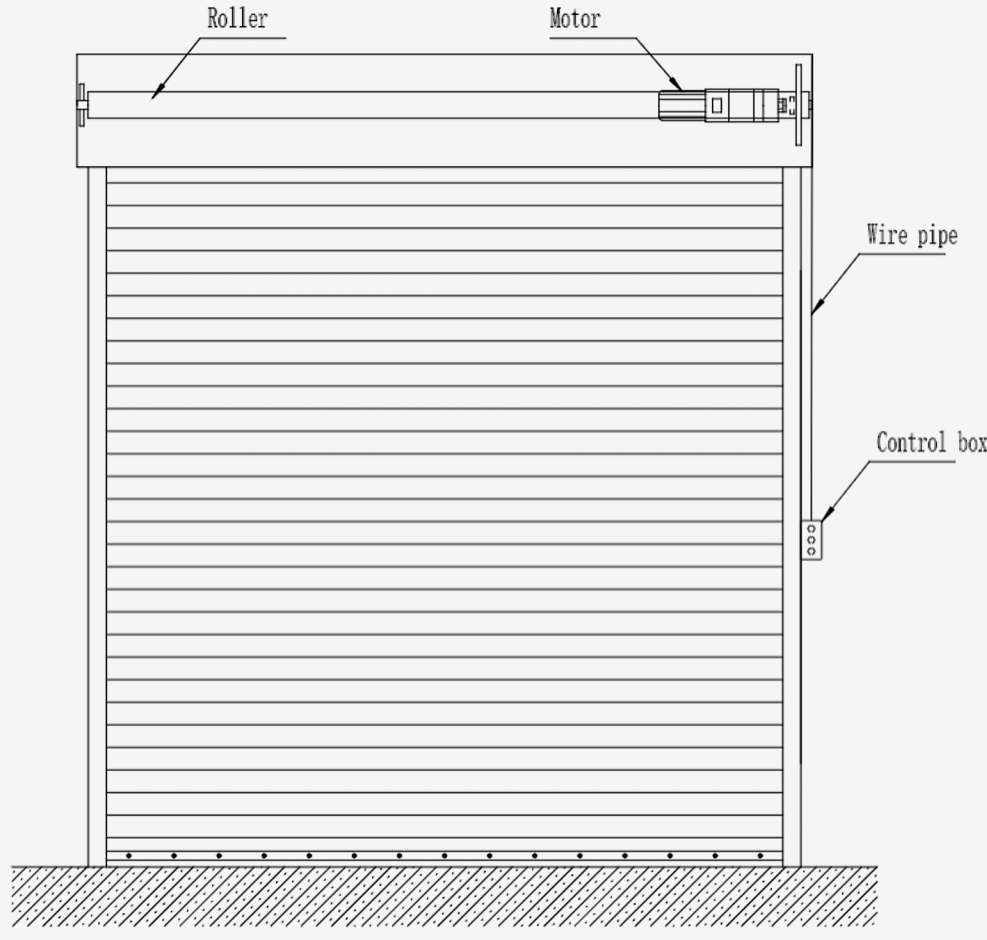

MOTOR



- Chinese top brand motor
- Can be opened manually when power failure

We use exclusive motors for rolling doors, which can be used to open the door manually during a power outage, providing double protection.



BUTTON AND REMOTE

Opening methods include buttons and remote controls which can open the door remotely.



Wireless Wall Switch
Beautiful and easy to install



SAFETY DEVICE



Closure Detector



Photo Detector

Closure detector and photocell sensor serve as safety devices that can detect pedestrians passing by in time, providing safety guarantee for people when entering and exiting.



SLATS

- Slat thickness: 0.8-1.0mm
- Material: Galvanized steel or Stainless steel

There are a variety of slates with different styles and functions to choose.



RAILS WITH SEAL




120mm*60mm*1.8mm 100mm*55mm*1.5mm 90mm*50mm*1.5mm

The track can be equipped with optional sealing rubber strips to effectively enhance the airtightness and sound insulation performance of the door body, which is suitable for places with high requirements for environmental control.



HOOD COVER BOX

The hood cover box is also made of galvanized steel. The presence of the box can extend the service life of the motor.

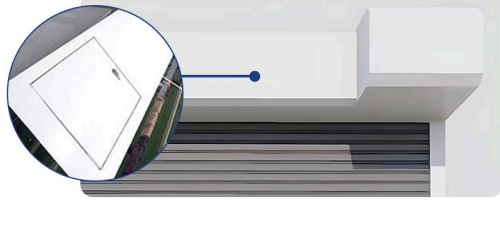

CUSTOMIZED SERVICE

- ✓ Ral Code Color
- ✓ Color Splicing
- ✓ LOGO

